


STATION ~~R~~ SILENT GROVE TS 6547 GS

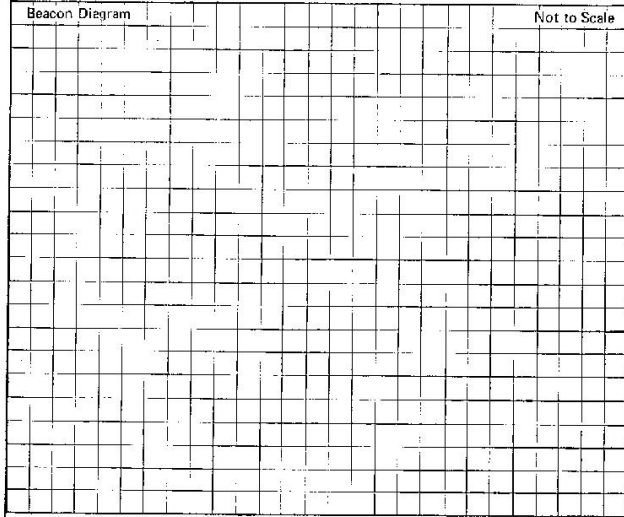

Owner's Name: VACANT CROWN
 Address: LAND
 Phone: _____
 Current Occupant: _____
 Address: _____
 Phone: _____

21, 24/4/1979 ACCESS
 Access Report of/19..... was found suitable/unsuitable.
 Km Direction
 0.00 AT INTERSECTION IN VILLAGE OF TORRINGTON AT "TABLELANDS HOTEL"
 FOLLOW ROAD NORTH TO SILENT GROVE.
 2.57 PASS RD ON LEFT.
 4.25 TAKE RIGHT FORK.
 10.45 PASS TRACK ON RIGHT.
 15.55 PARK TRUCK AT ALAIED TREES ON LEFT. TRIG SITE AT TOP
 OF CLIMB ABT 1 MIN EAST WALK.

This section to be completed by officer constructing pillar.
 Original station mark found/not found.
 Description of mark:
 Original beacon found/not found.
 Description of beacon:
 Height Top of Vanes to Top Mark.....m.
 Height of mark.....m. above rock/conc.....m. above G.L.
 below below
 Diameter of Vanes.....m. Height of Cairn.....m.
 Original Beacon has/has not been destroyed by me.

Date	Record of Station

GEODETTIC STATION RECONNAISSANCE and MAINTENANCE REPORT

NOW KNOWN AS: SILENT GROVE (P)

Description:

1. Cleared by lanes bearing 160° M to 160° M from Trig. Mast
2. Mast & Vanes have been painted white & black respectively. ✓
3. The ~~station~~/pillar was ~~unpiled/lost unpiled~~/constructed on 16" x 14" slab 1980, dimensions now being:
 Description of mark St. Pipe Plate should be explicit, e.g., S/Steel Pillar Plate, Steel plug, Brass plug, Bolt, G.I. Pipe
 Height of mark 1.370 m. ^{above}/_{below} rock/concrete; Mark is 1.690 m. ^{above}/_{below} rt. Rock.
 Height of Top Vanes to Top Mark/Pillar plate 1.450 m. Diameter of Vanes (vertical) 0.750 m.
 Height of Cairn.....m. Diameter of Cairn.....m. Name Plate found/not found/placed.
 Length of Mastm. (approximate if not unpiled)
4. A Copper Nail set in conc/rock has been placed/found, bearing 145° M from Mast/Plug/Pillar
5. A G.I. Pipe set in conc/rock has been placed/found, bearing 202° M from Mast/Plug/Pillar
6. A.....set in conc/rock has been placed/ found, bearing.....° M from Mast/Plug/Pillar
7. A.....set in conc/rock has been placed/ found, bearing.....° M from Mast/Plug/Pillar
8. Action required:.....

STANDPOINT: Base abc Pillar

STANDPOINT: Copper Nail


Mark	Direction	Horiz. Distance	Height Difference	Mark	Direction	Horiz. Distance	Height Difference
Copper Snake (BSP)	0 00 00		above standpt.	Copper Snake (BSP)	0 00 00		above standpt.
Mosman BR	126 46 50		above standpt.	G.I. Pipe	38 26 26	2.148	+0.181 above standpt.
Copper Nail (Placed)	262 08 00	2.437	1.762 below standpt.	Base abc Pillar	82 05 30	2.435	+1.765 above standpt.
G.I. Pipe (Placed)	321 17 26	1.730	1.584 below standpt.	Mosman BR	126 45 00		above standpt.
			above standpt.				above standpt.
			above standpt.				above standpt.
			above standpt.				above standpt.
			above standpt.				above standpt.

Prepared by: P. Jones 22-5-80


Checked: D. ... 06-70

Noted on U.T.M. Card

Checked 27-25/11/80

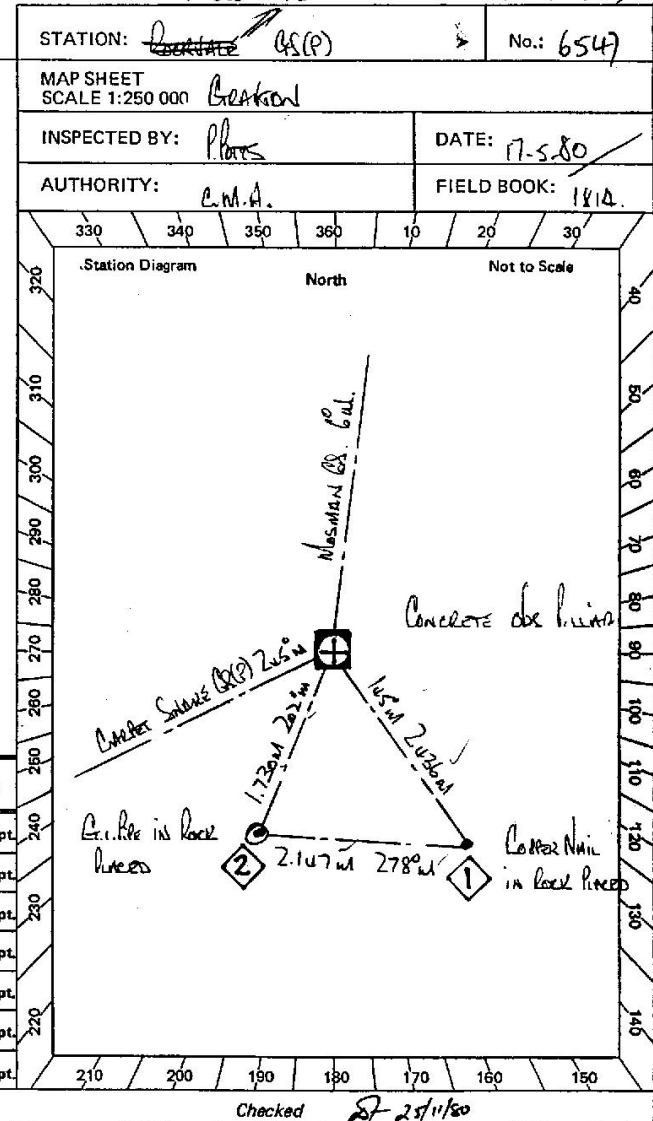

STATION ~~ROCKVALE (P)~~ SILENT GROVE TS 6547

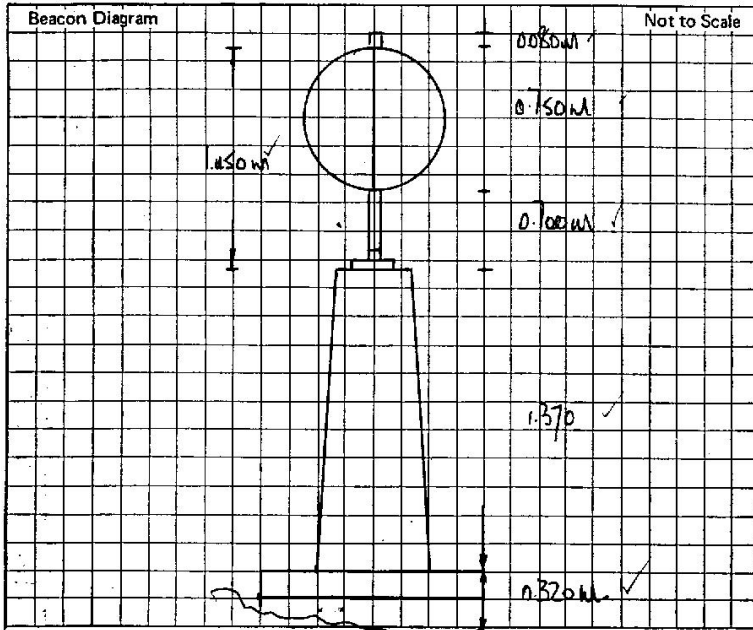

Owner's Name: VACANT CROWN LAND
 Address:
 Phone:
 Current Occupant:
 Address:
 Phone:

LWD- ACCESS
 Access Report of 17.5.1980 was found suitable/unsuitable.
 Km. FEATURE
 0.00 PD TENTERFIELD HEAD NORTH ALONG NEW ENGLAND HWAY
 5.20 TURN LEFT ONTO BRUNNER HWAY SIGN BENSHEAN
 21.00 TURN LEFT SIGN MOLE STATION, SILENT GROVE, TORRINGTON
 21.40 GRID 30.40 GRID 35.50 GRID - SIGN MOLE STATION
 39.10 CAUSEWAY
 39.70 PASS UPPER MOLE RIVER ROAD ON LEFT
 39.70 GRID 40.50 WOODEN BRIDGE
 40.60 TAKE RIGHT FORK
 41.00 CAUSEWAY 41.60 GRID 42.50 WOODEN BRIDGE + GRID
 43.30 TURN LEFT SIGN TORRINGTON 41 KM
 43.70 GRID 44.10 GRID 47.30 GRID 48.70 GRID 49.50 GRID
 49.60 CAUSEWAY 50.30 CAUSEWAY 50.40 CAUSEWAY
 50.60 GRID THEN TURN RIGHT 51.30 GRID + CAUSEWAY 51.90 CAUSEWAY.
 52.40 GRID 53.70 TAKE LEFT FORK. 53.90 CAUSEWAY 54.10 GRID
 54.80 GRID 55.10 CAUSEWAY 55.30 GRID 55.60 CAUSEWAY
 56.00 GRID 58.50 WOODEN BRIDGE 58.80 GRID 59.20 PASS ROAD ON LEFT
 60.50 GRID 62.70 GRID 64.70 GRID 66.50 GRID 67.80 TURN RIGHT OFF ROAD
 ONTO LWD TRACK FOLLOW TO TRIG
 68.10 TRIG GEODETIC STATION ROCKVALE

This section to be completed by officer constructing pillar.
 Original station mark found/not found.
 Description of mark:
 Original beacon found/not found.
 Description of beacon:
 Height Top of Vanes to Top Mark.....m.
 Height of mark.....m. above rock/conc.....m. above G.L.
 Diameter of Vanes.....m. Height of Cairn.....m.
 Original Beacon has/has not been destroyed by me.

Date	Record of Station	
17.5.1980	<u>As G.I. Pipe</u>	<u>HEIGHT DIFF</u>
<u>CONCRETE (P)</u>	<u>1.730</u>	<u>+1.584 - above standard</u>
<u>COPPER NAIL</u>	<u>2.146</u>	<u>0.178 - above standard</u>